

High pressure connectors W Series



Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://lemo.nt-rt.ru/> || ome@nt-rt.ru

Precision modular connectors to suit your application


Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.

Over 75000 connectors

The modular design of the LEMO range provides over 75000 connectors from miniature $\varnothing$ 3 mm to $\varnothing$ 50 mm, capable of handling cable diameters up to 30 mm and for up to 114 contacts. This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

LEMO's Push-Pull Self-Latching Connection System (not shown in this catalogue)

This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.

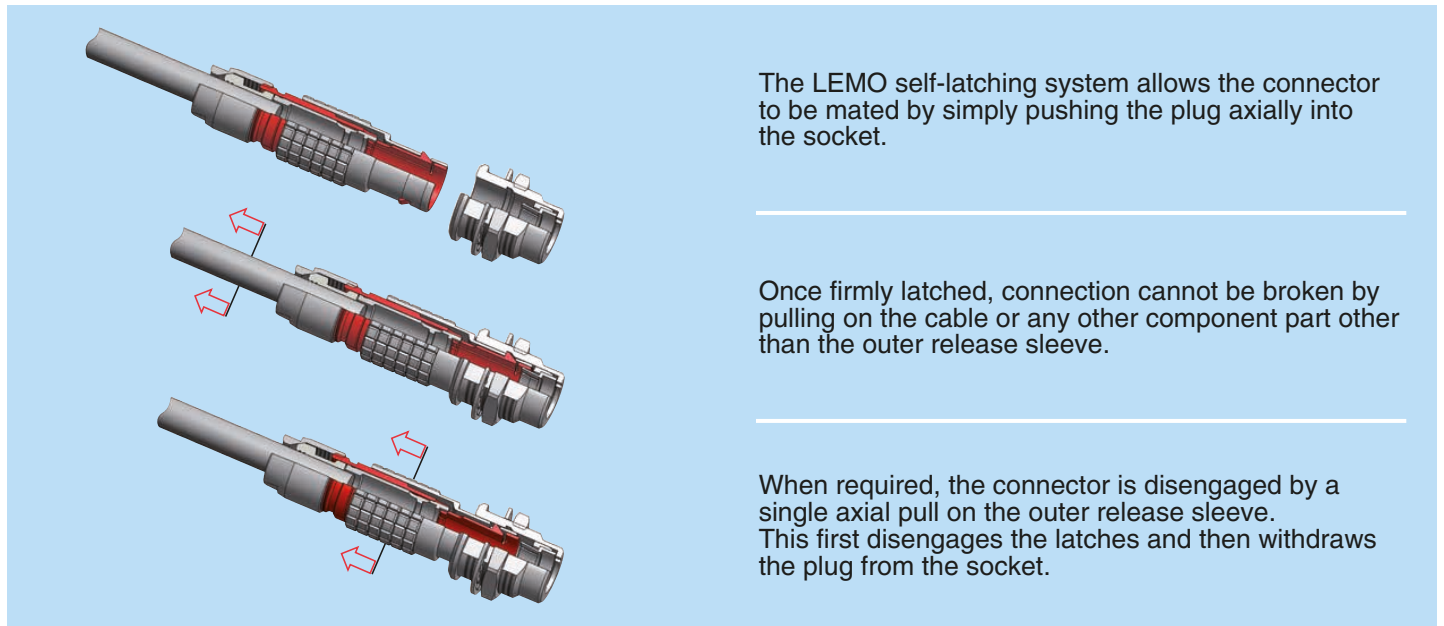

UL Recognition

LEMO connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (LEMO connector, cable and your equipment) will be easier because LEMO connectors are recognized.

CE marking

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

RoHS

LEMO connector specifications conform to the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.

W Series


W Series connectors have been developed for utilisation where protection must be guaranteed under high pressures of liquids. The basic elements, insulators, contacts and clamping system are from the B series. The push-pull latching system has been replaced by a screw coupling system with watertightness maintained by compression of an O-ring in FPM (Viton®) according to the triangular shaped cavity principle. There are multiple application possibilities ranging from nuclear physics to the petroleum industry. After cable assembly, the rear part must be covered by an adhesive heatshrink boot in order to ensure watertightness on the cable side. W series connectors provide the following main features:

- multipole types from 2 to 64 contacts
- fibre optic or hybrid types available upon request
- solder or crimp contacts
- keying system («G» key standard) for connector alignment
- multiple key options to avoid cross mating of similar connectors
- 360° screening for full EMC shielding
- rugged housing for extreme working conditions.


Interconnections

Models (page 5)


Straight plugs

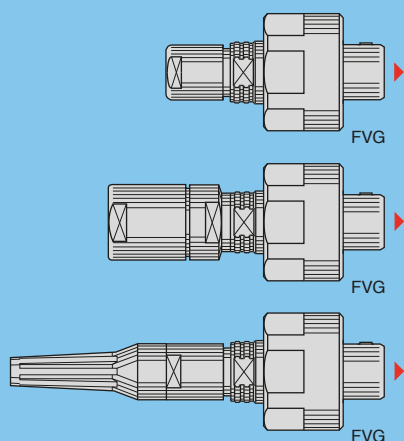

Fixed socket




Free sockets

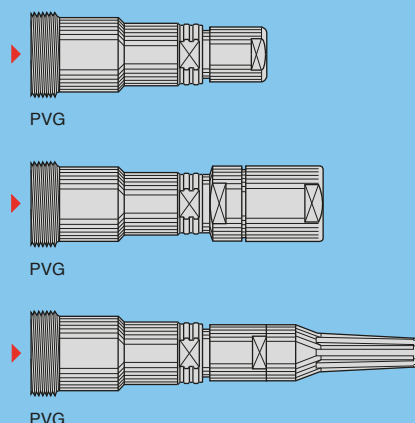

Vacuumtight models (page 8)


Fixed sockets



Part Section Showing Internal Components


Fixed socket

- 1 outer shell
- 2 earthing crown
- 3 retaining ring
- 4 hexagonal nut
- 5 insulator
- 6 female contact
- 7 O-ring




Straight plug

- 1 outer shell
- 2 coupling nut
- 3 circlip
- 4 collet nut
- 5 split insert carrier
- 6 o-ring
- 7 insulator
- 8 male contact
- 9 earthing cone
- 10 collet + washer ¹⁾
- 11 gasket

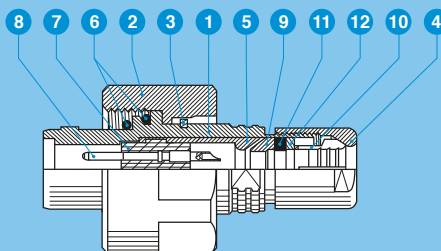


Part Number Example

Straight plug with cable collet

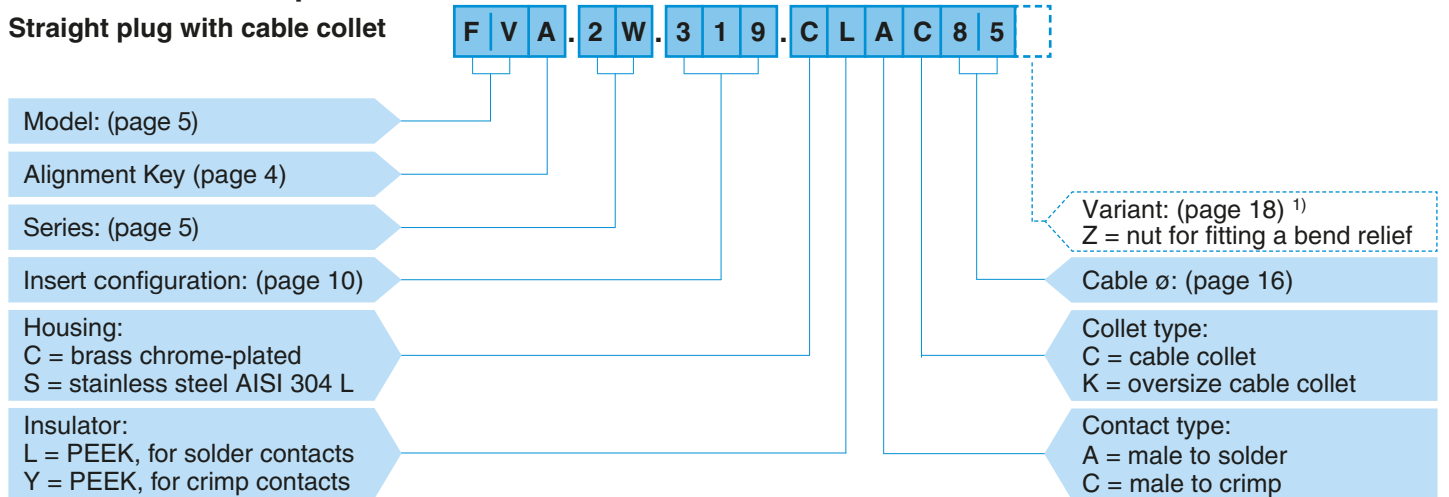

FVA.2W.319.CLAC85 = straight plug with key (A), 2W series, multipole type with 19 contacts, outer shell in chrome-plated brass, PEEK insulator, male solder contacts, C type collet for 8.5 mm diameter cable.

Fixed socket, vacuumtight

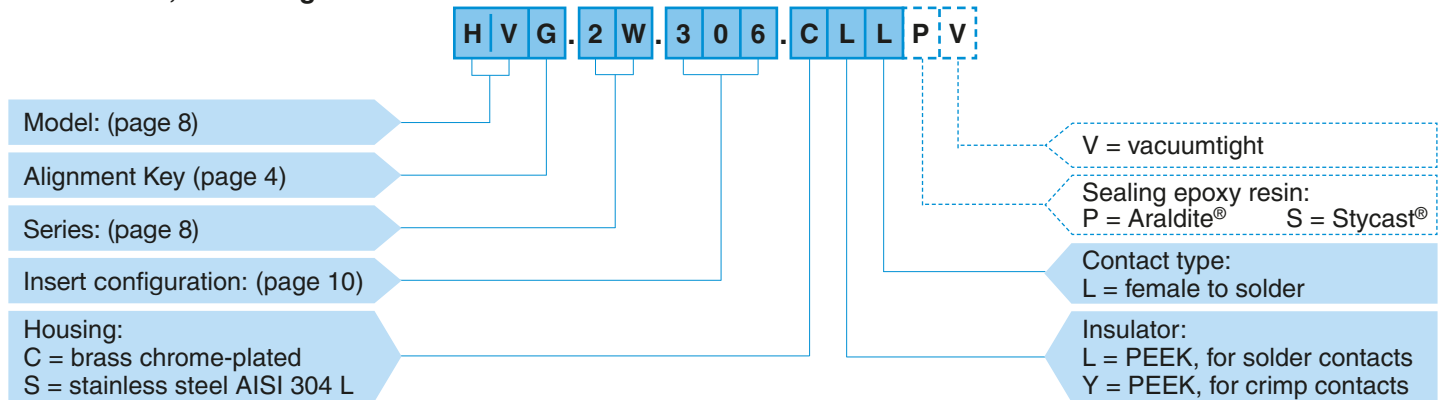

HVG.2W.306.CLLPV = fixed socket, nut fixing, key (G), 2W series, multipole type with 6 contacts, outer shell in chrome-plated brass, PEEK insulator, female solder contacts, potted with Araldite® epoxy resin, vacuumtight.

Note: ¹⁾ The «Variant» position in the reference is used to specify either the presence of a collet nut for fitting the bend relief. For models with collet nut for fitting the bend relief, a «Z» should be indicated and a bend relief can be ordered separately. An order for a connector with bend relief should thus include two part numbers.



Alignment Key and Polarized Keying System

W series connector model part numbers are composed of three letters. The LAST LETTER indicates the key position and the contact type (male or female).

Front view of a socket	Ref.	Nb of keys	Angles	Series	Contact type		Note
					Plug	Socket	
	G	1		0°	male	female	●
	A	2	α	30°	male	female	●
	B	2	α	45°	male	female	●
	L	2	γ	75°	female	male	○

● Available
○ On request



Models

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	> 1000 cycles	IEC 60512-5 test 9a
Temperature range	-20° C, +200° C	
Salt spray corrosion test ²⁾	> 1000 h	IEC 60512-6 test 11f
Protection index (mated)	> IP 68	IEC 60529
Resistance to hydrostatic pressure (mated)	~ 30 bars ¹⁾	IEC 60512-7 test 14d
Climatical category	20/200/21	IEC 60068-1

Electrical


Characteristics	Value	Standard
Shielding efficiency	at 10 MHz	> 95 dB
	at 1 GHz	> 80 dB
		IEC 60169-1-3

Note:

¹⁾ in order to perform correctly and withstand the pressure, cable assembly shall be made according to instruction we recommend. See page 21.


²⁾ for chrome plated product («C» material code).

FVG Straight plug, key (G) or keys (A, B or L), cable collet

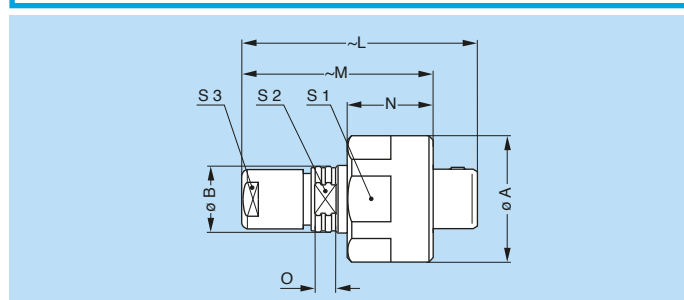


Reference		Dimensions (mm)								
Model	Series	A	B	L	M	N	S1	S2	S3	O
FVG	0W	17.2	9.6	38.0	32.8	13.5	16	8	8	3.8
FVG	1W	19.3	11.6	43.5	35.5	14.0	18	10	9	3.8
FVG	2W	23.5	15.2	52.5	43.0	15.5	22	13	12	5.0
FVG	3W	27.8	17.6	61.8	48.2	16.5	26	15	15	5.8
FVG	4W	34.3	22.8	71.5	57.5	17.5	32	20	19	10.0
FVG	5W	50.0	35.0	99.6	82.6	21.0	47	32	30	14.4

FVG Straight plug, key (G) or keys (A, B or L), oversize cable collet ¹⁾

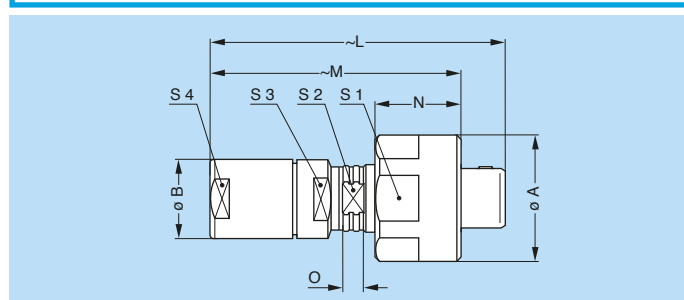


Reference		Dimensions (mm)									
Model	Series	A	B	L	M	N	S1	S2	S3	S4	O
FVG	0W	17.2	11.0	50.1	44.9	13.5	16	8	10	9	3.8
FVG	1W	19.3	14.5	58.3	50.3	14.0	18	10	12	12	3.8
FVG	2W	23.5	17.0	68.7	59.2	15.5	22	13	15	15	5.0
FVG	3W	27.8	22.0	85.6	72.0	16.5	26	15	19	19	5.8
FVG	4W	34.3	34.0	117.7	103.7	17.5	32	20	30	30	10.0


Note: ¹⁾ correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 16).

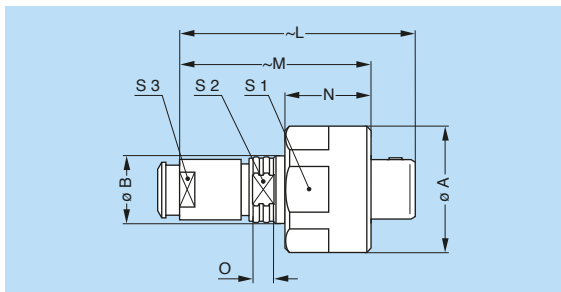

Note: ¹⁾ to order, add a «Z» at the end of the reference.
The bend relief must be ordered separately (see unipole/multipole catalog).

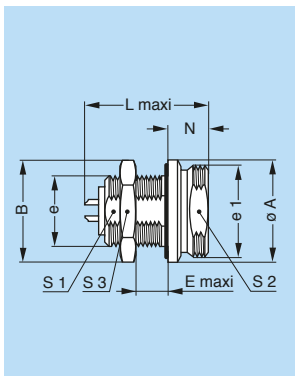


Panel cut-out (page 21)

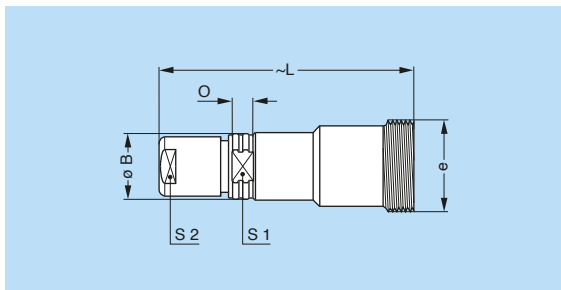

Reference		Dimensions (mm)					
Model	Series	B	e	L	S1	S2	O
PVG	0W	9.6	M14x1.0	37.9	8	8	3.8
PVG	1W	11.6	M16x1.0	46.5	10	9	3.8
PVG	2W	15.2	M20x1.0	54.5	13	12	5.0
PVG	3W	17.6	M24x1.0	65.7	15	15	5.8
PVG	4W	22.8	M30x1.0	76.0	20	19	10.0
PVG	5W	35.0	M45x1.5	103.6	32	30	14.4




PVG Free socket, key (G) or keys (A, B or L), oversize cable collet ¹⁾

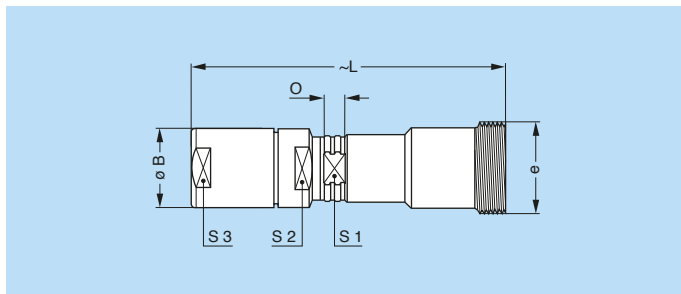

Reference		Dimensions (mm)						
Model	Series	B	e	L	S1	S2	S3	O
PVG	0W	11.0	M14x1.0	50.0	8	10	9	3.8
PVG	1W	14.5	M16x1.0	61.3	10	12	12	3.8
PVG	2W	17.0	M20x1.0	70.7	13	15	15	5.0
PVG	3W	22.0	M24x1.0	89.5	15	19	19	5.8
PVG	4W	34.0	M30x1.0	122.2	20	30	30	10.0


Note: ¹⁾ correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 16).

PVG Free socket, key (G) or keys (A, B or L), cable collet and nut for fitting a bend relief ¹⁾

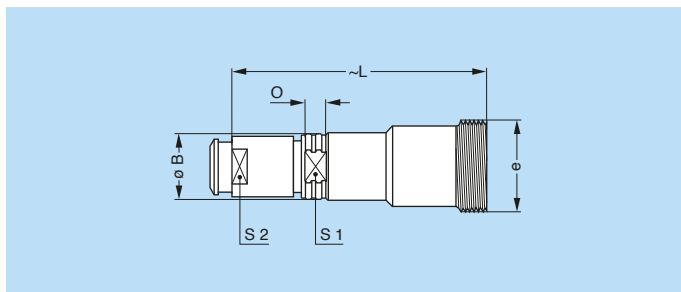

Reference		Dimensions (mm)					
Model	Series	B	e	L	S1	S2	O
PVG	0W	9.6	M14x1.0	37.9	8	7	3.8
PVG	1W	11.6	M16x1.0	46.5	10	9	3.8
PVG	2W	15.2	M20x1.0	54.5	13	12	5.0
PVG	3W	17.6	M24x1.0	64.7	15	15	5.8
PVG	4W	22.8	M30x1.0	76.0	20	19	10.0

Note: ¹⁾ to order, add a «Z» at the end of the reference. The bend relief must be ordered separately (see unipole/multipole catalog).



Vacuumtight models

HRG and HVG socket models allow the device on which they are fitted to reach a protection index of IP68 as per IEC 60529. They are fully compatible with plugs of the same series and are widely used for portable radios, military, laboratory equipment, aviation, etc. These models are made in a vacuumtight version. They are identified by an additional letter «V» at the end of the part number (certificate on request).

Epoxy resin is used to seal these models and we are offering 2 different resins:

- a) Epoxy Araldite®, for general purpose use, identify with letter «P»
- b) Epoxy Stycast®, for oil and petrol industry, identify with the letter «S».

Part number example:

Vacuumtight socket potted with Araldite® epoxy: HVG.0W.304.CLLPV

Vacuumtight socket potted with Stycast® epoxy: HVG.0W.304.CLLSV

Technical Characteristics

Mechanical and Climatical

Characteristics	Value	Standard
Endurance	> 1000 cycles	IEC 60512-5 test 9a
Humidity	up to 95% at 60° C	
Temperature range (0W-1W)	- 20° C/+100° C	
Temperature range (2W to 5W)	- 20° C/+80° C	
Salt spray corrosion test ³⁾	> 1000 h	IEC 60512-6 test 11f
Climatical category	20/80/21	IEC 60068-1
Leakage rate (He) ¹⁾	< 10 ⁻⁷ mbar.l.s ⁻¹	IEC 60512-7 test 14b

Characteristics	Value	Standard
Maximum operating pressure ²⁾	0W	60 bars
	1W	60 bars
	2W	40 bars
	3W	30 bars
	4W	15 bars
	5W	5 bars


Note:

¹⁾ for vacuumtight models.

²⁾ this value corresponds to the maximum allowed pressure difference for the assembled socket if used in the unmated condition.

³⁾ for chrome plated product («C» material code).


HVG Fixed socket, nut fixing, key (G) or keys (A, B or L), vacuumtight

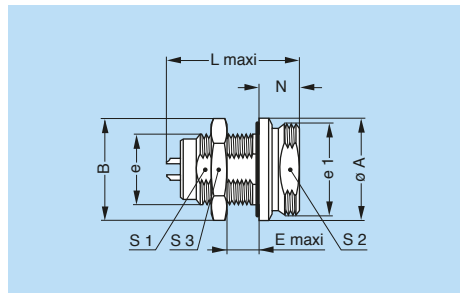

Reference		Dimensions (mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S2	S3
HVG	0W	16.2	16.0	M12x1.0	M14x1.0	5.5	24.1	8.0	10.5	12.5	14
HVG	1W	18.3	19.5	M14x1.0	M16x1.0	11.5	30.0	8.0	12.5	14.5	17
HVG	2W	22.5	21.5	M16x1.0	M20x1.0	14.5	35.8	9.0	14.5	18.5	19
HVG	3W	26.6	27.0	M20x1.0	M24x1.0	17.5	42.2	9.5	18.5	22.5	24
HVG	4W	32.8	34.2	M24x1.0	M30x1.0	20.0	48.2	9.5	22.5	28.5	30
HVG	5W	48.0	53.0	M38x1.5	M45x1.5	22.0	55.6	12.5	35.5	42.5	46

Panel cut-out (page 21)

HRG Fixed socket, nut fixing, key (G) or keys (A, B or L), hexagonal flange, vacuumtight

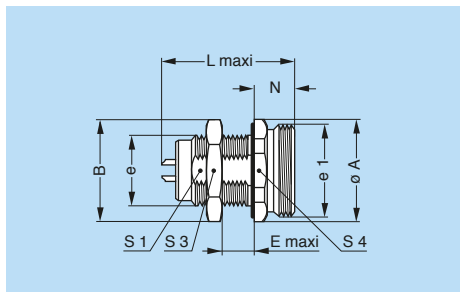

Reference		Dimensions (mm)									
Model	Series	A	B	e	e1	E	L	N	S1	S3	S4
HRG	0W	18	16	M12x1.0	M14x1.0	5.5	24.1	8	10.5	14	17



Panel cut-out (page 21)



Insert configuration

Other like fibre optic or hybrid are available, please consult us.

Multipole

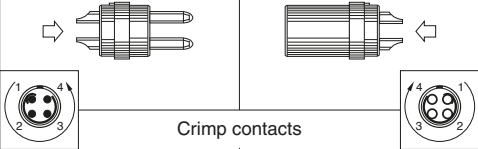	Solder contacts  Crimp contacts		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) ¹⁾
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact	Test voltage (kV rms) ¹⁾ Contact-shell	
											min.	max.			
2			302	0W	0.9	●	●	●	●	20	32	20	1.00	1.05	10.0 ²⁾
				1W	1.3	●	●	●	●	20	26	18	1.50	1.35	15.0 ³⁾
				2W	2.0	●	●	●	●	16	18	12	2.10	1.75	25.0 ³⁾
				3W	3.0	●	●	○	–	12	14	10	2.10	1.55	35.0
				5W	6.0	●	–	–	–	8	–	–	3.60	2.95	50.0
3			303	0W	0.9	●	●	●	●	20	32	20	1.20	0.90	8.0 ²⁾
				1W	1.3	●	●	●	●	20	26	18	1.30	1.55	12.0
				2W	1.6	●	●	●	●	18	22	14	2.40	1.85	17.0 ³⁾
				3W	2.0	●	●	●	○	16	18	12	1.90	1.50	25.0
4			304	0W	0.7	●	●	●	●	22	32	22	0.85	0.70	7.0 ²⁾
				1W	0.9	●	●	●	●	22	32	20	1.35	1.45	10.0 ²⁾
				2W	1.3	●	●	●	●	20	26	18	1.85	1.85	15.0 ³⁾
				3W	2.0	●	●	●	●	16	18	12	1.45	1.25	19.0
				4W	3.0	●	●	○	–	12	14	10	2.10	1.50	30.0
				5W	4.0	●	●	○	–	10	12	10	2.95	2.65	35.0
5			305	0W	0.7	●	●	●	●	22	32	22	1.00	0.70	6.5 ²⁾
				1W	0.9	●	●	●	●	22	32	20	1.25	1.15	9.0 ²⁾
				2W	1.3	●	●	●	●	20	26	18	1.75	1.60	14.0 ³⁾
				3W	1.6	●	●	●	○	18	22	14	1.90	1.25	19.0
6			306												
				0W	0.5	●	○ ⁴⁾	●	●	28	32	28	0.85	0.65	2.5
				1W	0.7	●	●	●	●	22	32	22	1.05	1.20	7.0 ²⁾

- First choice alternative
- Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.









²⁾ rated current = 6A for socket with elbow (90°) contact for printed circuit.

³⁾ rated current = 12A for socket with elbow (90°) contact for printed circuit.

⁴⁾ available only for connectors fitted with male contacts.





Multipole

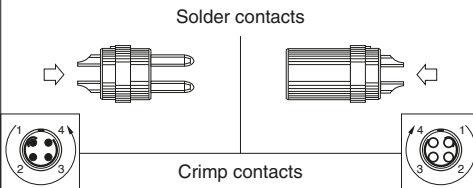	 Solder contacts			Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) ¹⁾
	 Crimp contacts		Solder				Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact	Test voltage (kV rms) ¹⁾ Contact-shell		
											min.	max.				
6				306	2W	1.3	●	●	●	●	20	26	18	1.35	1.45	12.0
				3W	1.6	●	●	●	○	18	22	14	1.60	1.15	17.0	
				4W	2.0	●	●	○	—	16	18	12	2.00	1.75	24.0	
7				307	0W	0.5	●	○ ³⁾	●	●	28	32	28	0.80	0.70	2.5
				1W	0.7	●	●	●	●	22	32	22	0.95	1.05	7.0 ²⁾	
				2W	1.3	●	●	●	●	20	26	18	1.75	1.60	11.0	
				3W	1.6	●	●	●	○	18	22	14	1.70	1.25	15.0	
				4W	2.0	●	●	○	—	16	18	12	2.00	1.80	20.0	
8				308												
				1W	0.7	●	●	●	●	22	32	22	0.95	1.15	5.0	
8				308												
				2W	0.9	●	●	●	●	22	32	20	1.50	1.25	10.0 ²⁾	
				3W	1.3	●	●	●	●	20	26	18	1.65	1.15	13.0	
9				309												
				0W	0.5	●	○ ³⁾	●	●	28	32	28	0.60	0.50	2.0	
9				309												
				3W	8x1.3 1x2.0	●	●	●	—	20 16	26 18	28 12	1.35	1.05	6.0 15.0	

- First choice alternative
○ Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.
²⁾ rated current = 6A for socket with elbow (90°) contact for printed circuit.
³⁾ available only for connectors fitted with male contacts.

Multipole


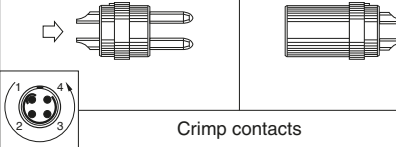

		Solder contacts  Crimp contacts 		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) ¹⁾
						Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact	Test voltage (kV rms) ¹⁾ Contact-shell		
											min.	max.				
10			310	1W	0.5	●	○ ³⁾	●	●	28	32	28	0.90	1.50	2.5	
				2W	0.9	●	●	●	●	22	32	20	1.45	1.30	8.0 ²⁾	
				3W	1.3	●	●	●	●	20	26	18	1.25	0.90	12.0	
				4W	1.6	●	●	○	—	18	22	14	1.85	1.30	17.0	
				5W	3.0	●	●	○	—	12	14	10	2.35	2.30	20.0	
12			312	2W	0.7	●	●	●	●	22	32	22	1.25	1.35	7.0 ²⁾	
				3W	0.9	●	●	●	●	22	32	20	1.45	1.00	9.0	
				4W	1.3	●	●	○	—	20	26	18	1.45	1.60	12.0	
14			314	1W	0.5	●	○ ³⁾	●	●	28	32	28	0.80	1.20	2.0	
				2W	0.7	●	●	●	●	22	32	22	1.15	1.35	6.5 ²⁾	
				3W	0.9	●	●	●	●	22	32	20	1.20	1.20	9.0 ²⁾	
				5W	2.0	●	●	○	—	16	18	12	2.10	2.00	18.0	
16			316													
				1W	0.5	●	○ ³⁾	●	○	28	32	28	0.80	1.25	1.5	
16			316	2W	0.7	●	●	●	●	22	32	22	0.95	1.25	6.0	
				3W	0.9	●	●	●	●	22	32	20	1.20	0.85	8.0	
				4W	0.9	●	●	●	—	22	32	20	1.35	1.50	10.0	
				5W	2.0	●	●	○	—	16	18	12	1.85	1.95	12.0	
18			318													
				2W	0.7	●	●	●	●	22	32	22	0.85	1.20	5.5	
				3W	0.9	●	●	●	●	22	32	—	1.20	1.05	7.0	

- First choice alternative
○ Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.
²⁾ rated current = 6A for socket with elbow (90°) contact for printed circuit.
³⁾ available only for connectors fitted with male contacts.






Multipole

	Solder contacts   Crimp contacts 		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) ¹⁾
			Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact	Test voltage (kV rms) ¹⁾ Contact-shell				
								min.	max.						
19			319	2W	0.7	●	●	●	●	22	32	22	0.95	1.25	5.0
20			320	3W	0.7	●	●	●	●	22	32	22	1.00	0.90	6.0
20			320	4W	0.9	●	●	●	—	22	32	20	1.35	1.00	8.0
				5W	1.6	●	●	○	—	18	22	14	1.90	1.70	10.0
22			322	3W	0.7	●	●	●	○	22	32	22	1.00	0.90	5.5
24			324	3W	0.7	●	●	●	●	22	32	22	0.95	0.80	4.0
				4W	0.9	●	●	●	—	22	32	20	1.20	1.45	7.0
26			326	2W	0.5	●	—	●	○	28	—	—	0.95	1.30	2.0
				3W	0.7	●	●	●	○	22	32	22	0.95	0.70	4.0

● First choice alternative
○ Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.

Multipole



		Solder contacts  		Crimp contacts  		Reference	Series	Contact ø (mm)	Contact type				AWG			Solder contact		Rated current (A) ¹⁾
		Solder	Crimp	Print (straight)	Print (elbow)				Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact	Test voltage (kV rms) ¹⁾ Contact-shell					
										min.	max.							
30			330	3W	0.7	●	●	●	●	22	32	22	0.80	0.70	3.5			
				4W	0.9	●	●	●	—	22	32	20	0.95	0.85	5.0			
				5W	1.3	●	●	○	—	20	26	18	1.45	1.60	8.0			
32			332	2W	0.5	●	—	●	○	28	—	—	0.80	1.20	1.5			
32			332	3W	0.7	●	○	●	○	22	32	22	0.75	0.70	3.0			
40			340	4W	0.7	●	●	●	—	22	32	22	0.90	0.90	2.0			
				5W	1.3	●	●	○	—	20	26	18	1.30	1.45	7.0			
48			348	4W	0.7	●	●	●	—	22	32	22	0.70	0.70	1.5			
48			348	5W	1.3	●	●	●	—	20	26	18	1.20	1.10	6.0			
50			350	5W	0.9	●	●	●	—	22	32	20	1.30	1.60	6.0			

● First choice alternative
○ Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.



Multipole

	 Solder contacts		Reference	Series	Contact ø (mm)	Contact type				AWG		Solder contact		Rated current (A) ¹⁾	
	 Crimp contacts					Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	Crimp		Test voltage (kV rms) ¹⁾ Contact-contact		Test voltage (kV rms) ¹⁾ Contact-shell
											min.	max.			
54			354	5W	0.9	●	●	●	—	22	32	20	1.15	1.55	5.0
64			364	5W	0.9	●	●	●	—	22	32	20	1.30	1.55	3.0

- First choice alternative
○ Special order alternative

Note: ¹⁾ see calculation method, caution and suggested standard.



Collets

C and K type collets

0W, 1W, 2W and 3W series



	Reference		Collet ø		Cable ø	
	Type	Code	ø A	ø B	max.	min.
0W	C	10 ¹⁾	1.6	—	1.2	1.0
	C	15 ¹⁾	1.6	—	1.5	1.3
	C	20 ¹⁾	2.1	—	2.0	1.6
	C	25	3.1	—	2.5	2.1
	C	30	3.1	—	3.0	2.6
	C	35	4.2	4.2	3.5	3.1
	C	40	4.2	4.2	4.0	3.6
	C	45	5.2	5.2	4.5	4.1
	K	50	5.2	5.2	5.0	4.6
	K	55	6.2	6.2	5.5	5.1
	K	60	6.2	6.2	6.0	5.6
	K	65	7.2	6.7	6.5	6.1
1W	C	30	3.2	—	3.0	2.6
	C	35	4.2	—	3.5	3.1
	C	40	4.2	—	4.0	3.6
	C	45	5.2	—	4.5	4.1
	C	50	5.2	—	5.0	4.6
	C	55	6.2	6.2	5.5	5.1
	C	60	6.2	6.2	6.0	5.6
	C	65	7.2	6.7	6.5	6.1
	K	70	7.2	—	7.0	6.6
	K	75	8.2	8.2	7.5	7.1
	K	80	8.2	8.2	8.0	7.6
	K	85	9.2	8.6	8.5	8.1
2W	C	30	3.2	—	3.0	2.6
	C	35	4.2	—	3.5	3.1
	C	40	4.2	—	4.0	3.6
	C	45	5.2	—	4.5	4.1
	C	50	5.2	—	5.0	4.6
	C	55	6.2	—	5.5	5.1
	C	60	6.2	—	6.0	5.6
	C	65	7.2	—	6.5	6.1
	C	70	7.2	—	7.0	6.6
	C	75	8.2	—	7.5	7.1
	C	80	8.2	—	8.0	7.6
	C	85	9.2	—	8.5	8.1

	Reference		Collet ø		Cable ø	
	Type	Code	ø A	ø B	max.	min.
2W	C	80	8.2	8.2	8.0	7.6
	C	85	9.2	8.6	8.5	8.1
	K	90	9.2	—	9.0	8.6
	K	95	10.2	10.2	9.5	9.1
	K	10	10.2	10.2	10.0	9.6
	K	11	11.2	10.6	10.5	10.1
3W	C	30	3.2	—	3.0	2.6
	C	35	4.2	—	3.5	3.1
	C	40	4.2	—	4.0	3.6
	C	45	5.2	—	4.5	4.1
	C	50	5.2	—	5.0	4.6
	C	55	6.2	—	5.5	5.1
	C	60	6.2	—	6.0	5.6
	C	65	7.2	—	6.5	6.1
	C	70	7.2	—	7.0	6.6
	C	75	8.2	—	7.5	7.1
	C	80	8.2	—	8.0	7.6
	C	85	9.2	—	8.5	8.1
	C	90	9.2	—	9.0	8.6
	C	95	10.2	10.2	9.5	9.1
	C	10	10.2	10.2	10.0	9.6
	C	11	11.2	10.6	10.5	10.1
	K	11	12.3	—	12.0	10.6
	K	12	13.8	13.8	12.8	12.1
	K	13	13.8	13.8	13.5	12.9
	K	14	15.3	15.3	14.0	13.6
	K	15	15.3	15.3	15.0	14.1


Note: All dimensions are in millimetres.

¹⁾ the inner diameter of the smallest bend relief available is 2.5 mm (in TPU) / 1.7 mm (in silicone).



C and K type collets

4W series



4W

Reference		Collet ø		Cable ø	
Type	Code	ø A	ø B	max.	min.
C	50	6.3	—	5.0	4.8
C	55	6.3	—	5.5	5.1
C	60	6.3	—	6.0	5.6
C	65	7.3	—	6.5	6.1
C	70	7.3	—	7.0	6.6
C	75	8.3	—	7.5	7.1
C	80	8.3	—	8.0	7.6
C	85	9.3	—	8.5	8.1
C	90	9.3	—	9.0	8.6
C	95	10.8	—	9.5	9.1
C	10	10.8	—	10.5	9.6
C	11	12.3	—	12.0	10.6
C	12	13.8	13.8	12.8	12.1
C	13	13.8	13.8	13.5	12.9
C	14	15.3	15.3	14.0	13.6
C	15	15.3	15.3	15.0	14.1
K	16	17.8	—	16.5	15.6
K	17	17.8	—	17.5	16.6
K	18	19.8	—	18.5	17.6
K	19	19.8	—	19.5	18.6
K	20	21.8	—	20.5	19.6
K	21	21.8	—	21.5	20.6
K	22	23.8	23.8	22.5	21.6
K	23	23.8	23.8	23.5	22.6


5W series



5W



Reference		Collet ø		Cable ø	
Type	Code	ø A	ø B	max.	min.
C	10	11.8	—	10.5	9.6
C	11	11.8	—	11.5	10.6
C	12	13.8	—	12.5	11.6
C	13	13.8	—	13.5	12.6
C	14	15.8	—	14.5	13.6
C	15	15.8	—	15.5	14.6
C	16	17.8	—	16.5	15.6
C	17	17.8	—	17.5	16.6
C	18	19.8	—	18.5	17.6
C	19	19.8	—	19.5	18.6
C	20	21.8	—	20.5	19.6
C	21	21.8	—	21.5	20.6
C	22	23.8	23.8	22.5	21.6
C	23	23.8	23.8	23.5	22.6

Note: All dimensions are in millimetres.



Variant


Bend relief for W series models with collet

Need to be ordered					Need to be ordered				
									
Ref.		Collet		Need to be ordered separately	Ref.		Collet		Need to be ordered separately
		Type	Code				Type	Code	
0W	z	C	30 to 45	GMA.0B.●●●.●●	3W	z	C	30 to 10	GMA.3B.●●●.●●
		K	50	GMA.1B.●●●.●●			K	11 to 15	GMA.4B.●●●.●●
1W	z	C	30 to 65	GMA.1B.●●●.●●	4W	z	C	50 to 15	GMA.4B.●●●.●●
		K	70 to 85	GMA.2B.●●●.●●					
2W	z	C	30 to 85	GMA.2B.●●●.●●					
		K	90 to 10	GMA.3B.●●●.●●					

Note: The bend relief must be ordered separately (see the unipole/multipole catalog). All dimensions are in millimetres.

Accessories

BFG Plug caps with key (G) (IP68 and resistance to hydrostatic pressure 30 bars)

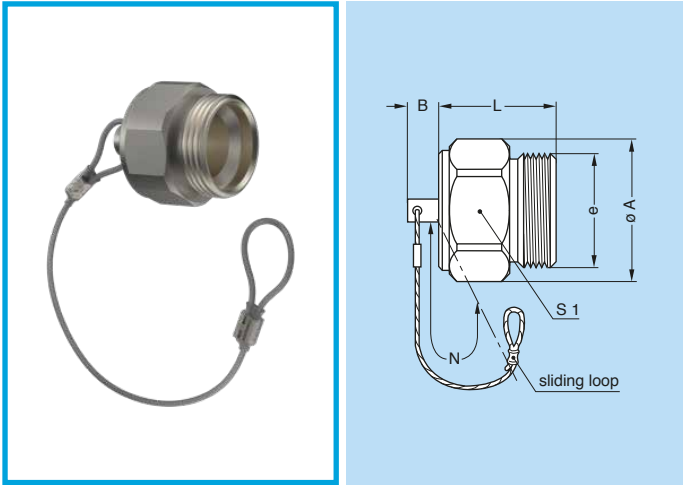


Part number	Series	Dimensions (mm)					
		A	B	e	L	N ¹⁾	S1
BFG.0W.100.●AZ	0W	7.2	6	M14x1.0	12.5	85	16
BFG.1W.100.●AZ	1W	19.3	6	M16x1.0	15.5	85	18
BFG.2W.100.●AZ	2W	23.5	6	M20x1.0	17.5	85	22
BFG.3W.100.●AZ	3W	27.8	6	M24x1.0	22.0	120	26
BFG.4W.100.●AZ	4W	34.3	10	M30x1.0	22.5	120	32
BFG.5W.100.●AZ	5W	50.0	10	M45x1.5	27.0	120	47

Note: 1) the tolerance on this dimension is ± 5 mm.

- Body material: ● = N, nickel-plated brass (Ni 3µm)
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass

BRE Blanking caps for fixed sockets (This cap is only IP68 when installed)

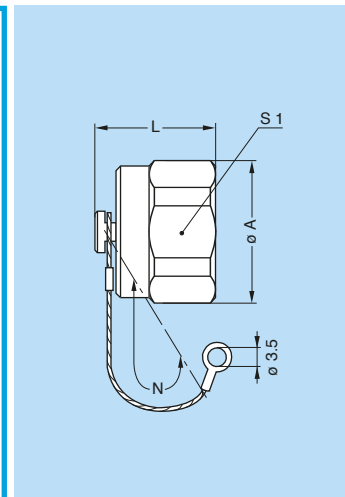


Part number	Series	Dimensions (mm)			
		A	L	N ¹⁾	S1
BRE.0V.200.●AV	0W	17.2	13.7	85	16
BRE.1V.200.●AV	1W	19.3	13.7	85	18
BRE.2V.200.●AV	2W	23.5	14.7	85	22
BRE.3V.200.●AV	3W	27.8	14.7	120	26
BRE.4V.200.●AV	4W	34.3	14.7	120	32
BRE.5V.200.●AV	5W	50.0	16.2	120	47

Note: 1) the tolerance on this dimension is ± 5 mm.

- Body material: ● = N, nickel-plated brass (Ni 3 μ m)
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

BRF Blanking caps for free sockets (This cap is only IP68 when installed)

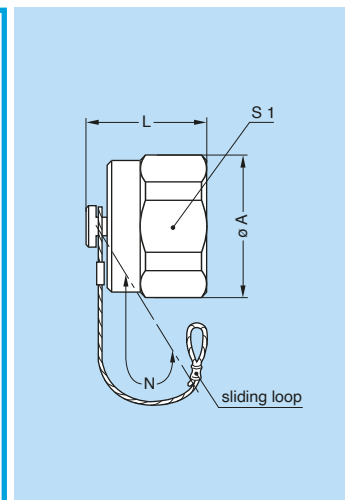


Part number	Series	Dimensions (mm)			
		A	L	N ¹⁾	S1
BRF.0V.200.●AV	0W	17.2	13.7	85	16
BRF.1V.200.●AV	1W	19.3	13.7	85	18
BRF.2V.200.●AV	2W	23.5	14.7	85	22
BRF.3V.200.●AV	3W	27.8	14.7	120	26
BRF.4V.200.●AV	4W	34.3	14.7	120	32
BRF.5V.200.●AV	5W	50.0	16.2	120	47

Note: 1) the tolerance on this dimension is ± 5 mm.

- Body material: ● = N, nickel-plated brass (Ni 3 μ m)
● = S, stainless steel
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

BRS Blanking caps for fixed sockets (This cap is resistant to 30 bars when installed)

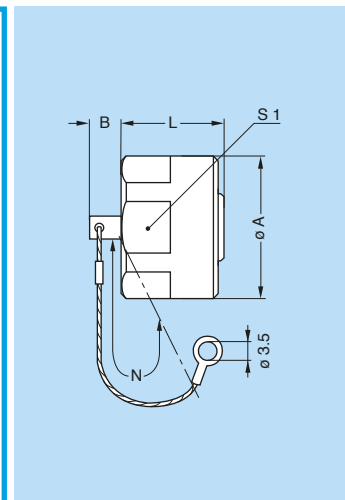


Part number	Series	Dimensions (mm)				
		A	B	L	N ¹⁾	S1
BRS.0V.200.CAV	0W	17.2	6.4	13.5	85	16
BRS.1V.200.CAV	1W	19.3	6.4	14.6	85	18
BRS.2V.200.CAV	2W	23.5	6.4	17.0	85	22
BRS.3V.200.CAV	3W	27.8	6.4	18.0	120	26
BRS.4V.200.CAV	4W	34.3	10.0	21.5	120	32
BRS.5V.200.CAV	5W	50.0	10.0	24.5	120	47

Note: 1) the tolerance on this dimension is ± 5 mm.

- Body material: Chrome-plated brass
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

BRP Blanking caps for free sockets (This cap is resistant to 30 bars when installed)

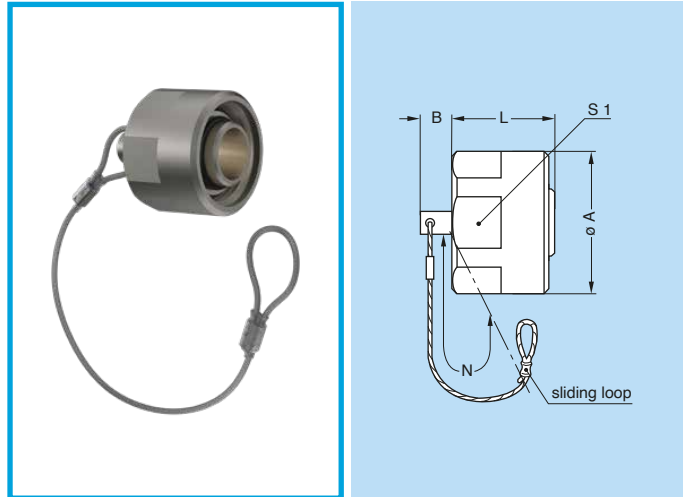


Part number	Series	Dimensions (mm)				
		A	B	L	N ¹⁾	S1
BRP.0W.200.CAV	0W	17.2	6.4	13.5	85	16
BRP.1W.200.CAV	1W	19.3	6.4	14.6	85	18
BRP.2W.200.CAV	2W	23.5	6.4	17.0	85	22
BRP.3W.200.CAV	3W	27.8	6.4	18.0	120	26
BRP.4W.200.CAV	4W	34.3	10.0	21.5	120	32
BRP.5W.200.CAV	5W	50.0	10.0	24.5	120	47

Note: 1) the tolerance on this dimension is ± 5 mm.

- Body material: Chrome-plated brass
- Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass
- O-ring: FPM (Viton®)

GEA Hexagonal nuts

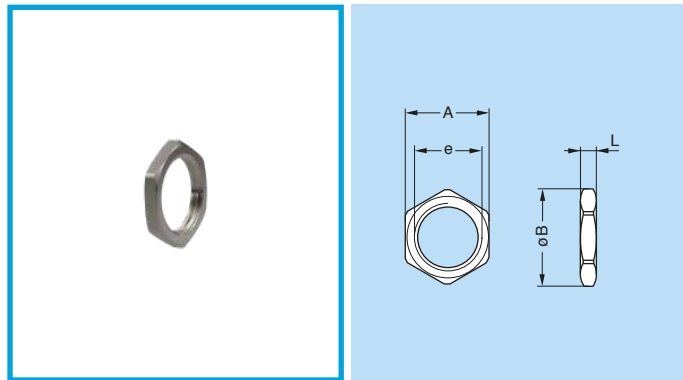


Part number	Series	Dimensions (mm)			
		A	B	e	L
GEA.1S.240.LN	0W	14	15.8	M12 x 1.00	2.5
GEA.0E.240.LN	1W	17	19.2	M14 x 1.00	2.5
GEA.1E.240.LN	2W	19	21.5	M16 x 1.00	3.0
GEA.2E.240.LN	3W	24	27.0	M20 x 1.00	4.0
GEA.3E.240.LN	4W	30	34.0	M24 x 1.00	5.0
GEA.5W.240.LN	5W	46	53.0	M38 x 1.50	8.0

- Material:
 - Nickel-plated brass (3 μ m)
 - Stainless steel

Note: to order this part separately, use the above part numbers. The last letters «LN» of the part number refer to the nut material and treatment. If a nut in stainless steel is desired, replace the last letters of the part number by «AZ».

GDA O-ring for plug

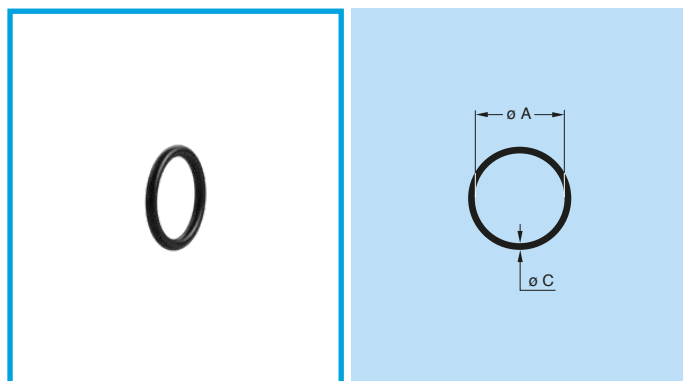


Part number	Series	Dim. (mm)	
		A	C
GDA.99.070.100VK	0W	7.0	1.00
GDA.99.090.125VK	1W	9.0	1.25
GDA.99.120.150VK	2W	12.0	1.50
GDA.99.150.150VK	3W	15.0	1.50
GDA.99.190.200VK	4W	19.0	2.00
GDA.99.310.250VK	5W	31.0	2.50

- Material: FPM (Viton®)

Panel cut-outs

Panel Cut-outs

EVG, HRG, HVG

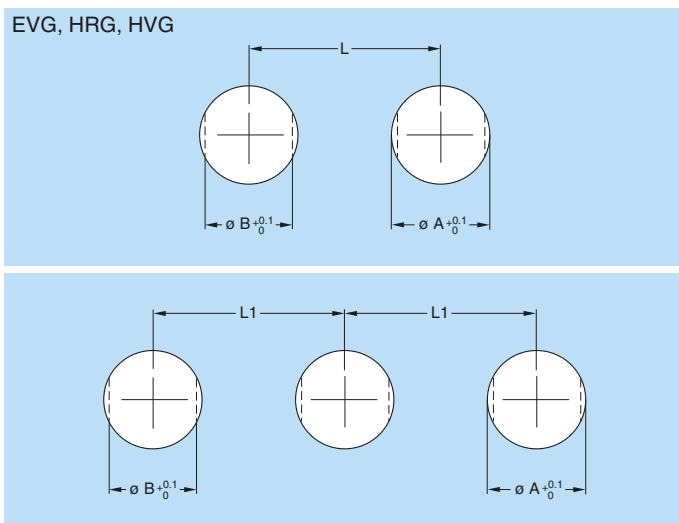

Series	Dimensions (mm)			
	A	B	L	L1
0W	12.1	10.6	23	31
1W	14.1	12.6	28	36
2W	16.1	14.6	31	41
3W	20.2	18.6	36	49
4W	24.2	22.6	42	61
5W	38.2	35.6	60	92

Mounting nuts torque

Component	Torque (Nm)					
	0W	1W	2W	3W	4W	5W
Collet nut for F●● and P●●	0.7	0.8	2	3	5	8
Mounting hex nut for sockets	7	9	11	14	19	24
Coupling nut	5	7	9	12	17	22

1N = 0.102 kg

Cable assembly

Assembly instructions

In order to ensure the sealing of plugs and sockets on the cable side, it is imperatively necessary to complete their assembly by realizing it with an adapted technique. We recommend the fitting of an heatshrink boot with inner melting coating of type ATUM (manufactured by the RAYCHEM company) or similar.

This heatshrink boot is not provided with the connector. Please consult us.

Product safety notice

PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION. IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.

1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock. Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification. Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses. The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

5. CE MARKING

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.

CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://lemo.nt-rt.ru/> || ome@nt-rt.ru